



CB612 6V, 1.2Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 6 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 1.2 Ah	20 hr @ 0.06 A : 1.2 Ah
● DIMENSIONS	10 hr @ 0.108 A : 1.08 Ah
TOTAL HEIGHT : 59 mm (2.32 inches)	5 hr @ 0.192 A : 0.96 Ah
CONTAINER HEIGHT : 52 mm (2.05 inches)	1 hr @ 0.72 A : 0.72 Ah
LENGTH : 97 mm (3.82 inches)	1 C @ 1.2 A : 0.6 Ah
WIDTH : 24 mm (0.95 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 50 mΩ
WEIGHT : APPROX 0.30 kg (0.66 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 12 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 36 A (0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-01	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 0.36 A


Discharge Characteristics 25 °C (77 °F)

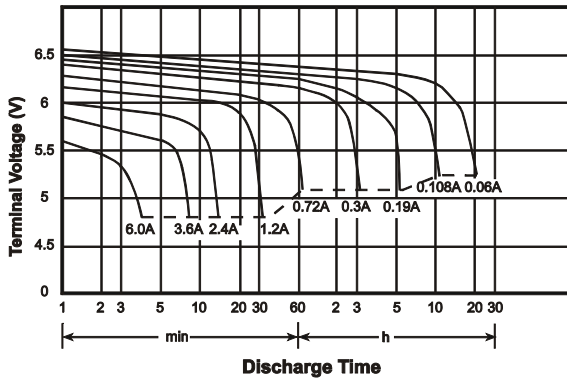

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

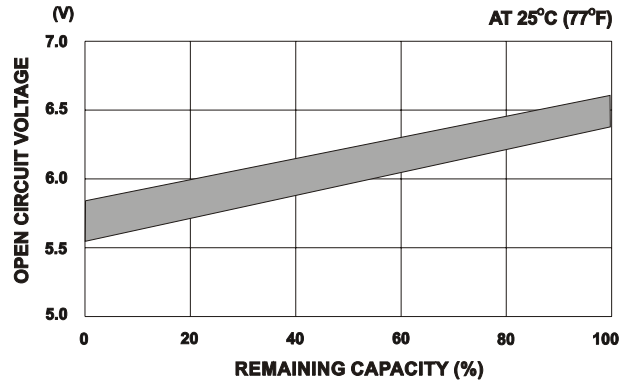

☆ Dimensions

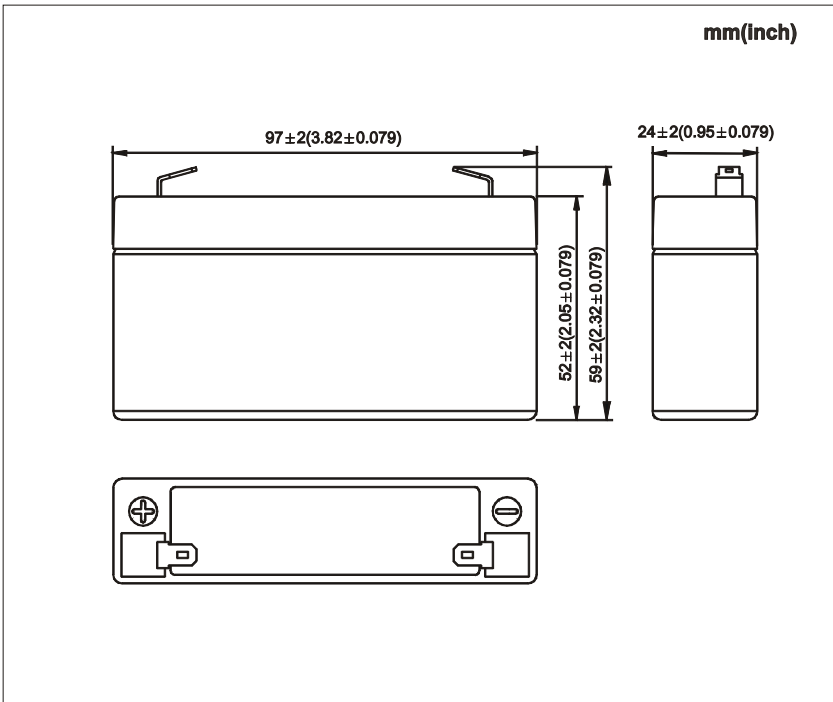

☆ Terminal

