

Lithium Manganese Dioxide Coin Battery CR1216

Type: CR1216

Performance Data: (23 ±3)

Nominal Voltage: 3.0V

Nominal Capacity: 30mAh (discharge current: 0.05mA, end-point voltage: 2.0v)

Max. Constant current: 2mA


Max. Pulse current: 5mA

Max. Diameter: 12.5mm

Max. Height: 1.6mm

Reference Weight: 0.6g

Discharge curve at various load (23°C)

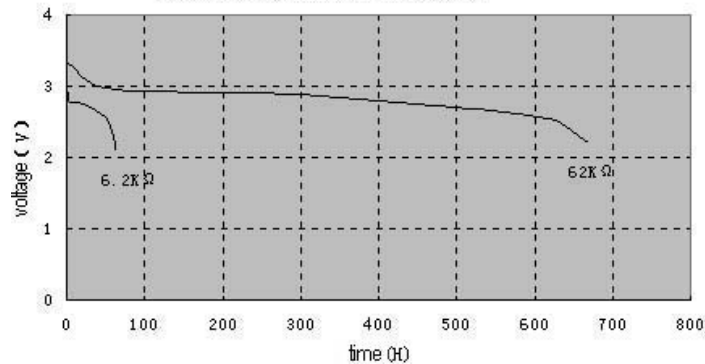

Discharge curve at various temperature (62K Ω)

