




UC12G-07PB

Type	Unit	UC12G-07PB
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	16 \pm 3
*Resonant Frequency	Hz	2400
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		PBT
Weight	g	2


*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

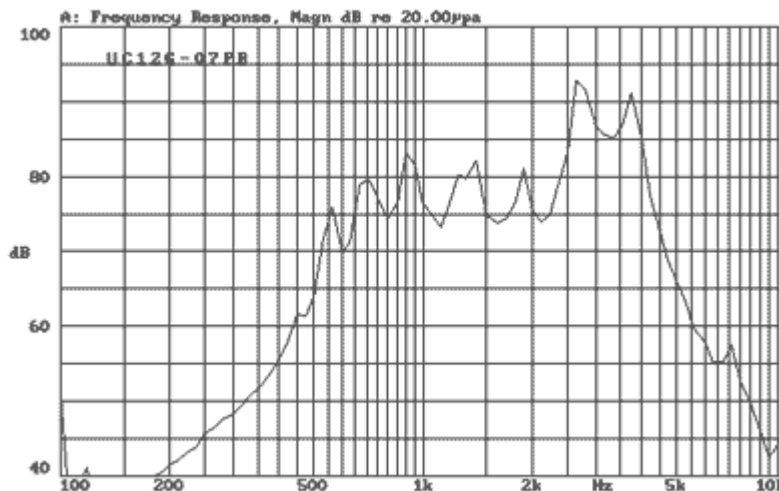

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm
Wave Solderable and Washable

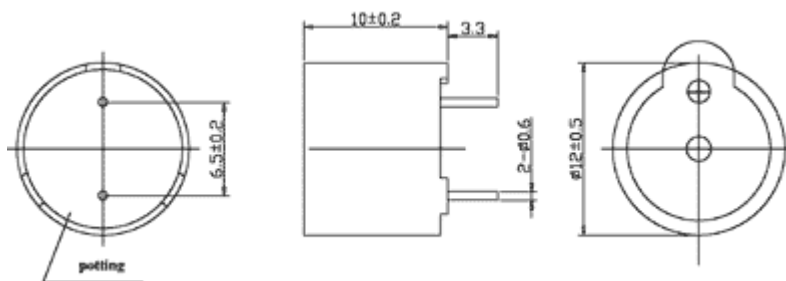




UC12G-07PG

Type	Unit	UC12G-07PG
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	16 \pm 3
*Resonant Frequency	Hz	2600
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		PBT
Weight	g	2


*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

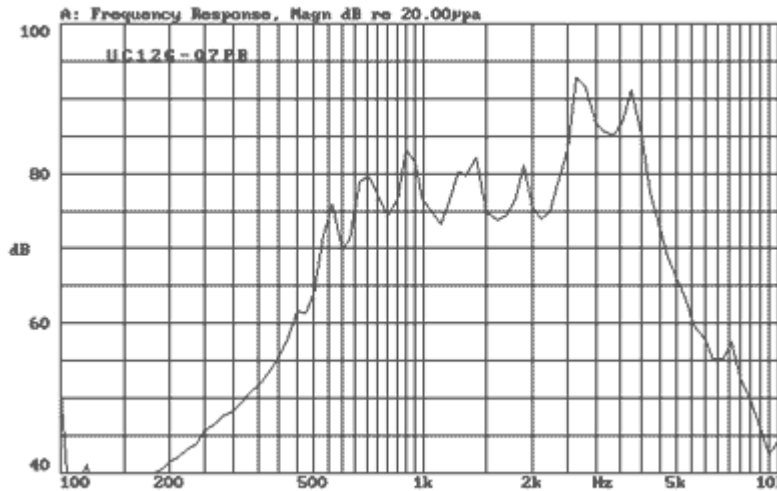

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm
Wave Solderable and Washable

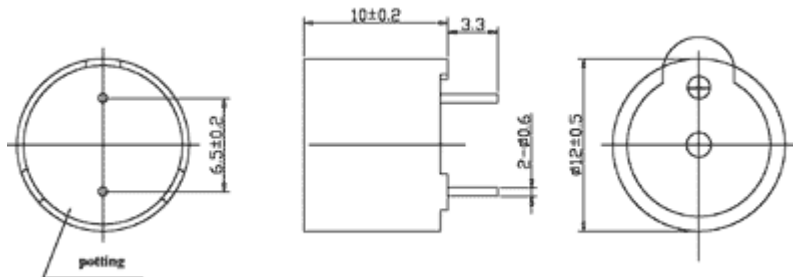




UC12G-05PB

Type	Unit	UC12G-05PB
Rated Voltage	V	5
Operating Voltage	V	3-8
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	40 \pm 4
*Resonant Frequency	Hz	2400
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		PBT
Weight	g	2

*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

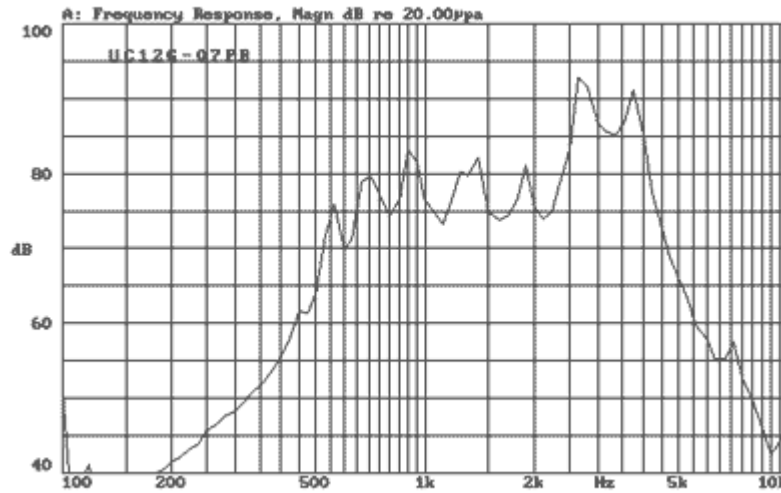

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm
Wave Solderable and Washable

