




UC12G-102MPA


Type	Unit	UC12G-102MPA
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	75
Coil Resistance	Ω	16 \pm 4
*Resonant Frequency	Hz	2048
Lead Pin Material		Brass
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		PPS
Weight	g	2

*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

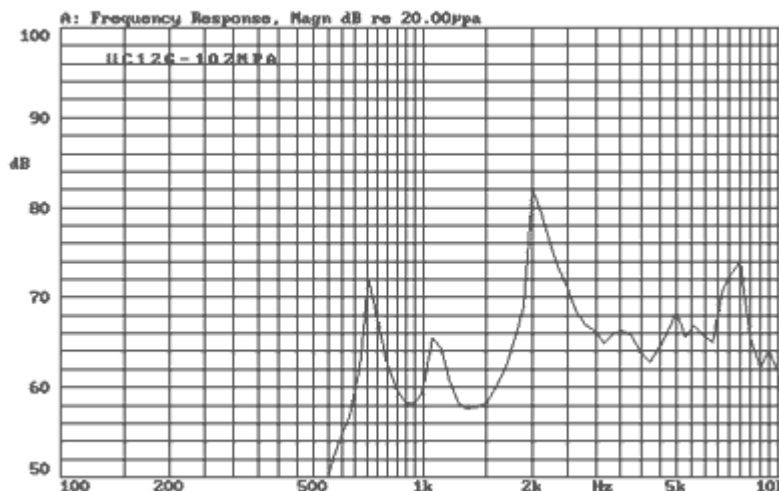

DIMENSIONS:

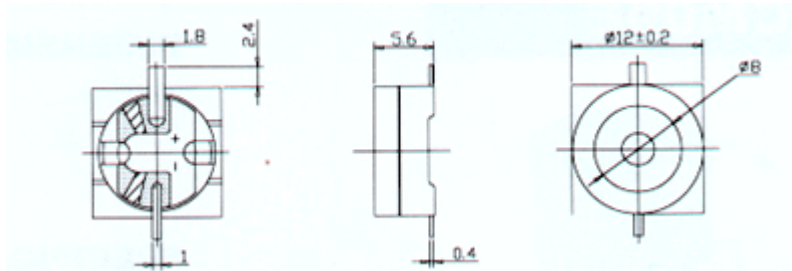

UNIT:mm
Tolerance: ± 0.5 mm
Reflow Solderable