




UC12G-106AP

Type	Unit	UC12G-106AP
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	75
Coil Resistance	Ω	16 \pm 4
*Resonant Frequency	Hz	2048
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		NORYL
Weight	g	2


*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

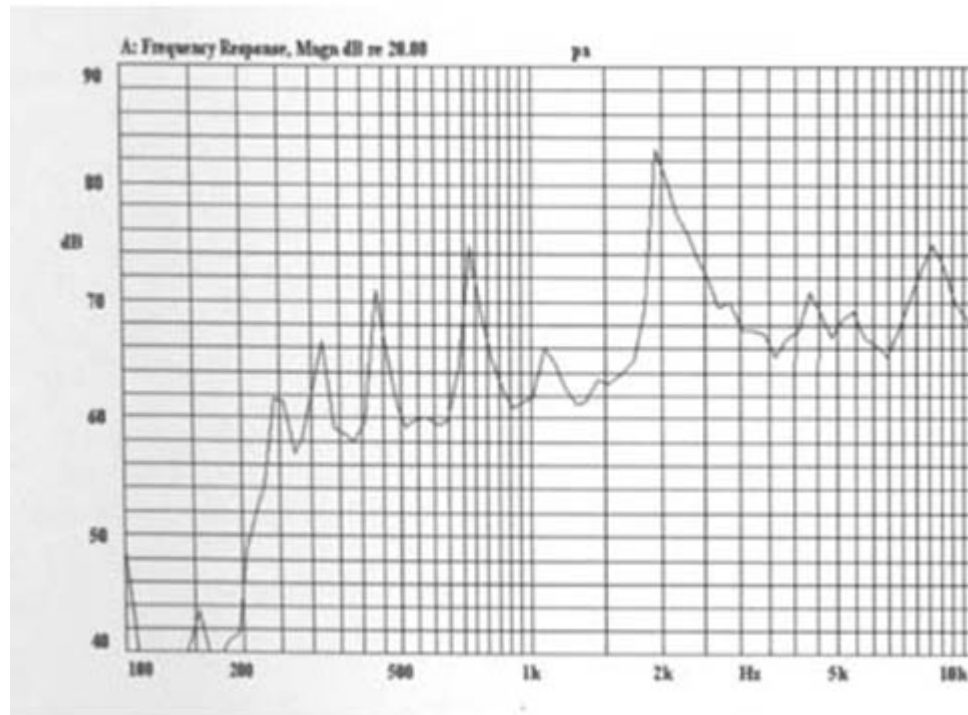

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm

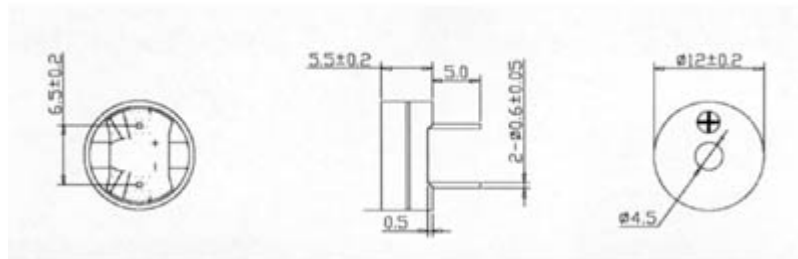




UC12G-106BP

Type	Unit	UC12G-106BP
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	15
*Min Sound Output at 10 cm	dB	70
Coil Resistance	Ω	42 \pm 6
*Resonant Frequency	Hz	2048
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		NORYL
Weight	g	2


*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

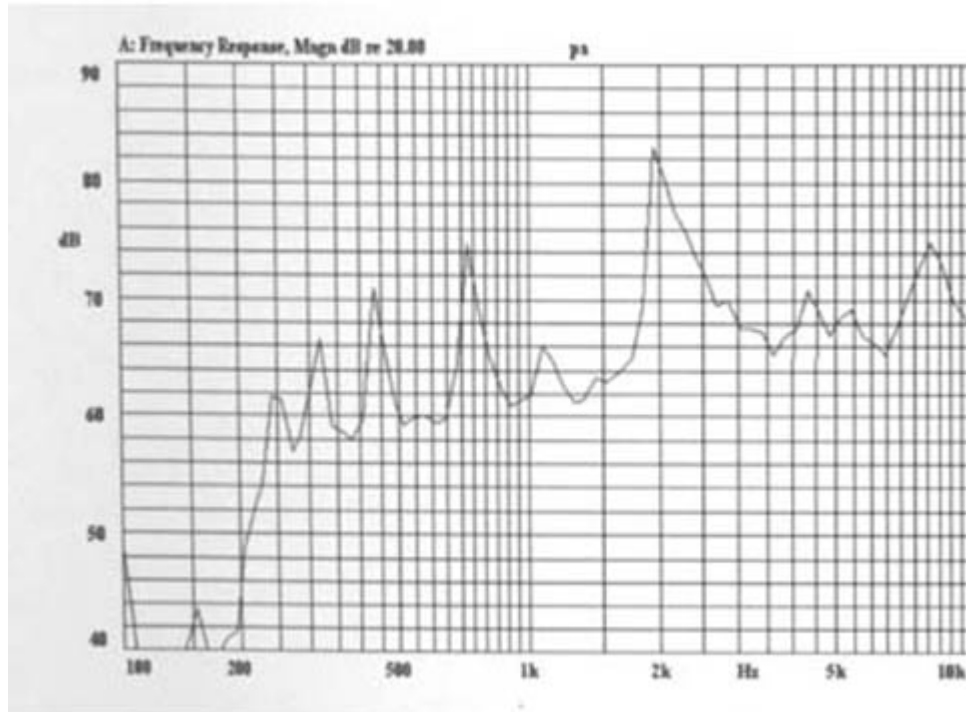

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm

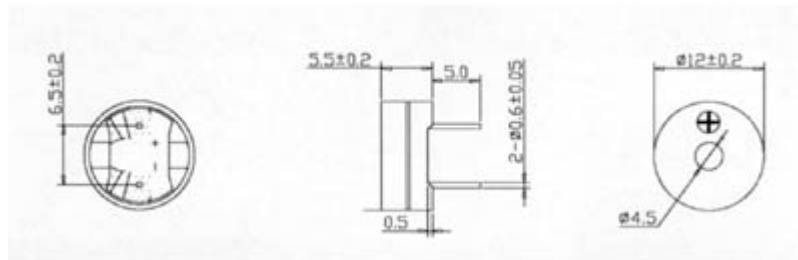




UC12G-106CP

Type	Unit	UC12G-106CP
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	10
*Min Sound Output at 10 cm	dB	70
Coil Resistance	Ω	50 \pm 7.5
*Resonant Frequency	Hz	2048
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		NORYL
Weight	g	2

*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

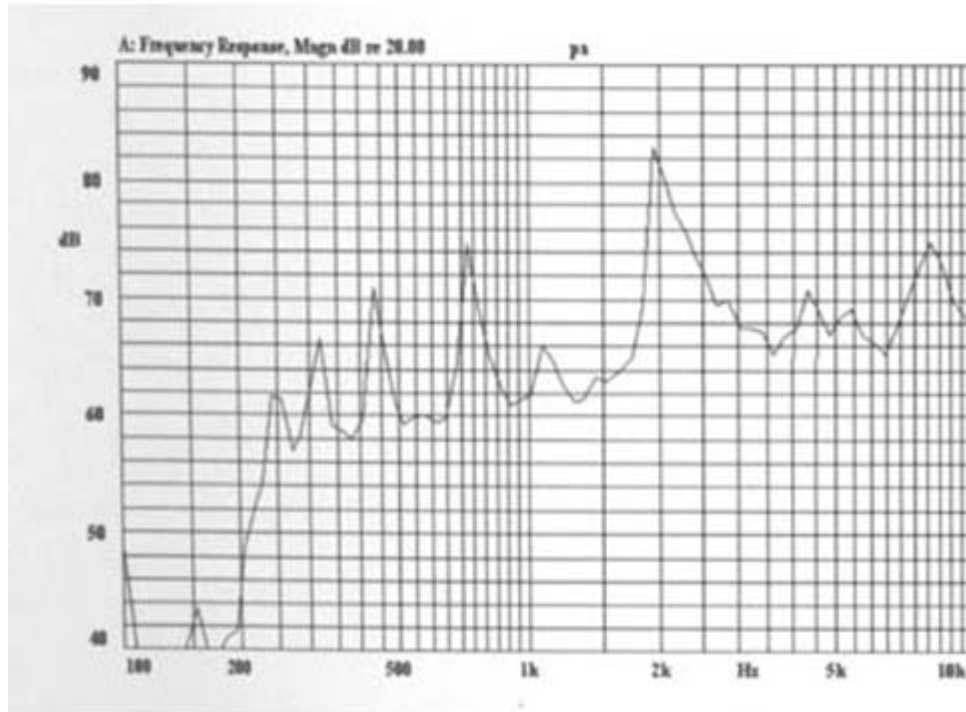

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm

