




UCM1606DPA

Type	Unit	UCM1606DPA
Rated Voltage	V	6
Operating Voltage	V	3-12
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	Ω	45±7
Coil Resistance	dB	85(at2048Hz)
*Resonant Frequency	Hz	2000-3000(min.80dBA)
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		NORYL
Weight	g	7


*Value Applying at Rated Voltage (resonant frequency,1/2 duty, square wave)

FREQUENCY RESPONSE:

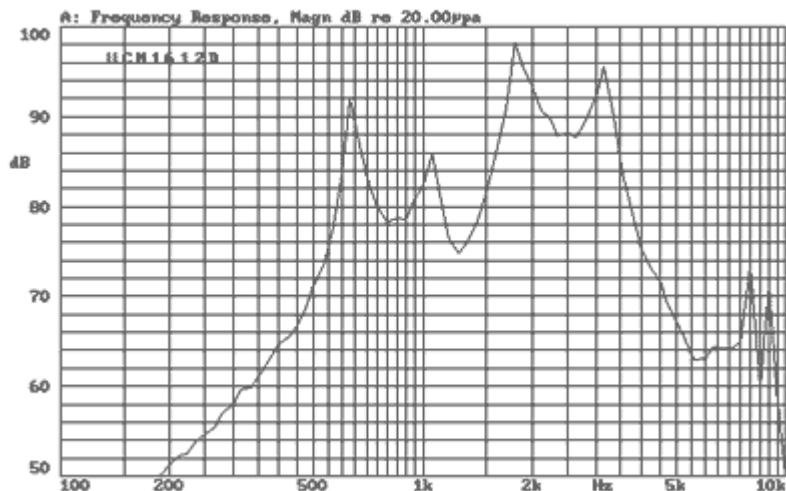

DIMENSIONS:

UNIT:mm
Tolerance:±0.5mm
Wave Solderable and Washable

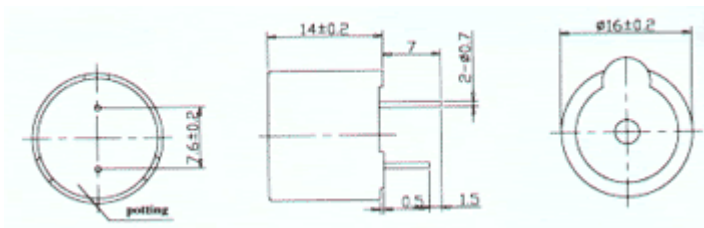




UCM1612DPA

Type	Unit	UCM1612DPA
Rated Voltage	V	12
Operating Voltage	V	8-16
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	Ω	115±17
Coil Resistance	dB	85(at2048Hz)
*Resonant Frequency	Hz	2000-3000(min.80dBA)
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		NORYL
Weight	g	7

*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

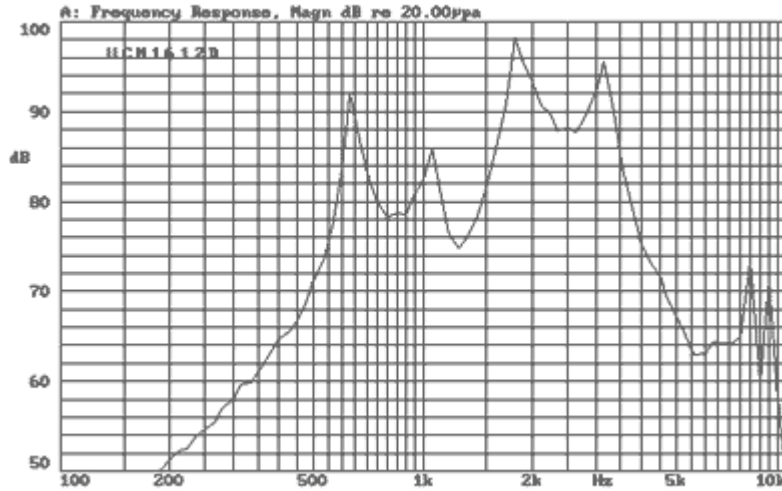

DIMENSIONS:

UNIT:mm
Tolerance:±0.5mm
Wave Solderable and Washable

