




Type	Unit	UCM1606XP
Rated Voltage	V	6
Operating Voltage	V	4-8
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
*Resonant Frequency	Hz	2300±300
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		NORYL
Weight	g	7


*Value Applying at Rated Voltage (DC)


FREQUENCY RESPONSE:

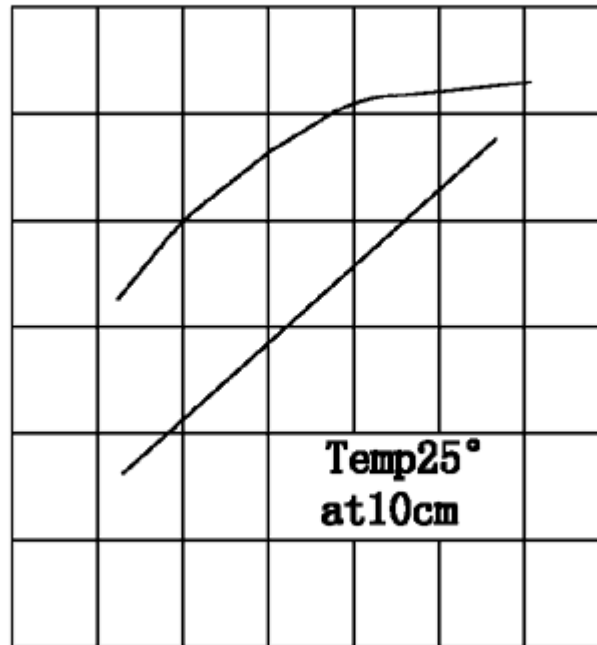

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm
Wave Solderable and Washable

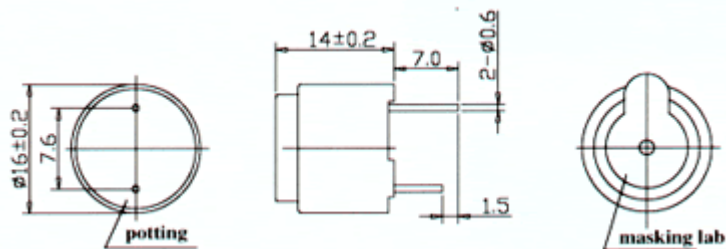




UCM1612XP

Type	Unit	UCM1612XP
Rated Voltage	V	12
Operating Voltage	V	8-15
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
*Resonant Frequency	Hz	2300±300
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		NORYL
Weight	g	7

*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

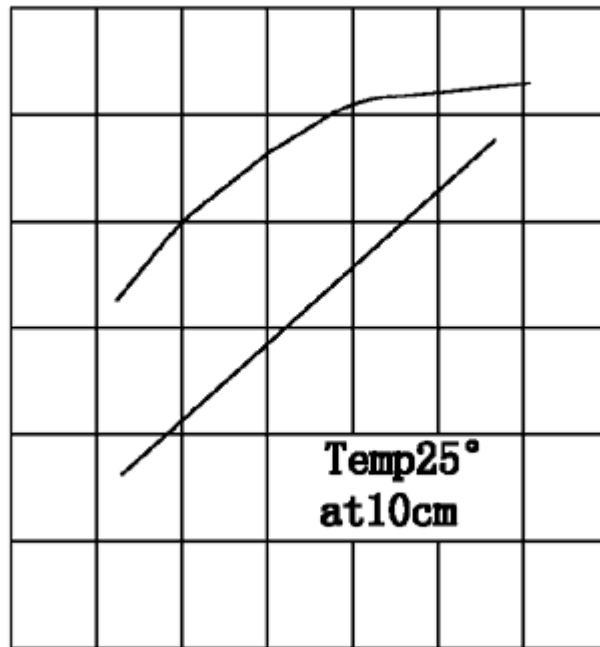

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm
Wave Solderable and Washable

