




UCT01

Type	Unit	UCT01
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	80
Coil Resistance	Ω	15±3
*Resonant Frequency	Hz	2400±400
Lead Pin Material		Brass
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		PPS
Weight	g	2.0


\*Value Applying at Rated Voltage (DC)

**FREQUENCY RESPONSE:**

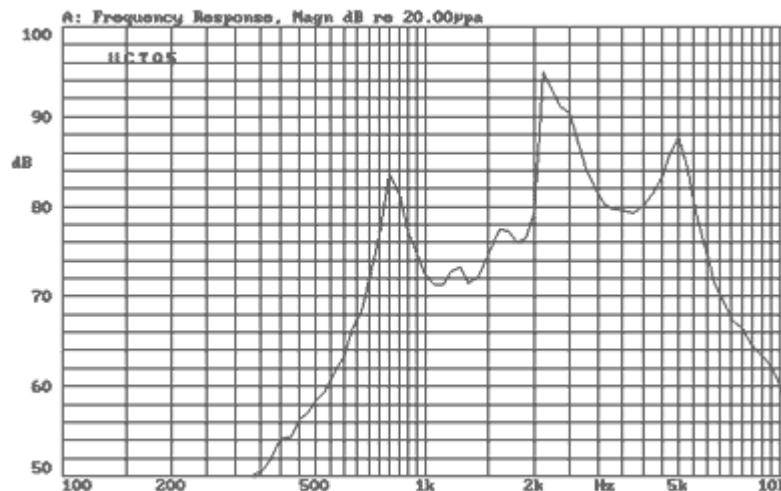

**DIMENSIONS:**

UNIT:mm  
Tolerance:±0.5mm  
Wave Solderable and Washable

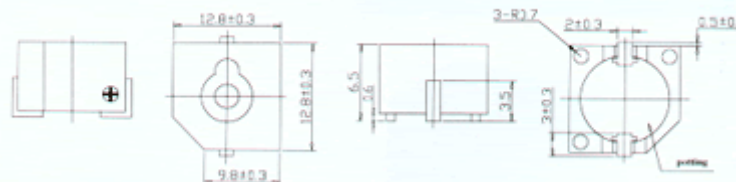




UCT05


Type	Unit	UCT05
Rated Voltage	V	5
Operating Voltage	V	3-8
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	dB	85
Coil Resistance	$\Omega$	45 $\pm$ 5
*Resonant Frequency	Hz	2400 $\pm$ 400
Lead Pin Material		Brass
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		PPS
Weight	g	2.0

\*Value Applying at Rated Voltage (DC)

**FREQUENCY RESPONSE:**

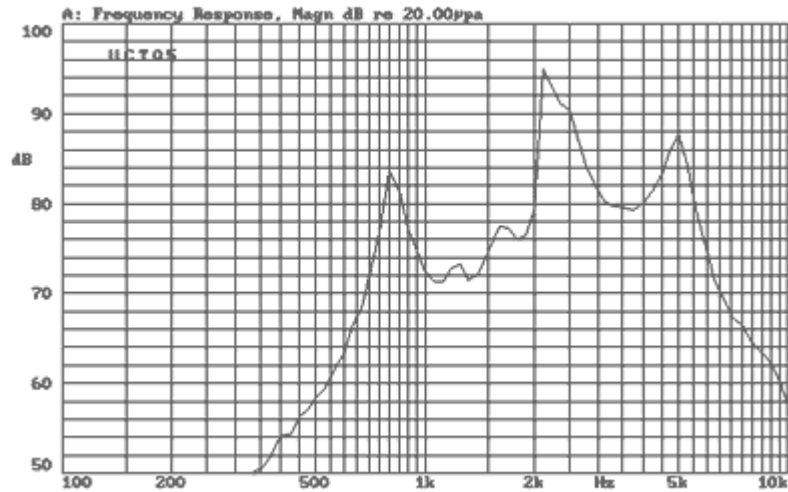

**DIMENSIONS:**

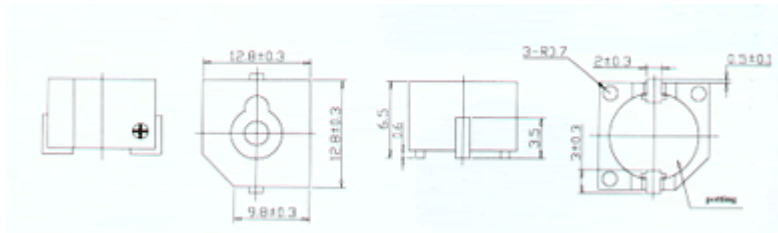

UNIT:mm  
Tolerance: $\pm$ 0.5mm  
Wave Solderable and Washable




UCT12

Type	Unit	UCT12
Rated Voltage	V	12
Operating Voltage	V	8-16
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	140±14
*Resonant Frequency	Hz	2400±400
Lead Pin Material		Brass
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		PPS
Weight	g	2.0

\*Value Applying at Rated Voltage (DC)

**FREQUENCY RESPONSE:**

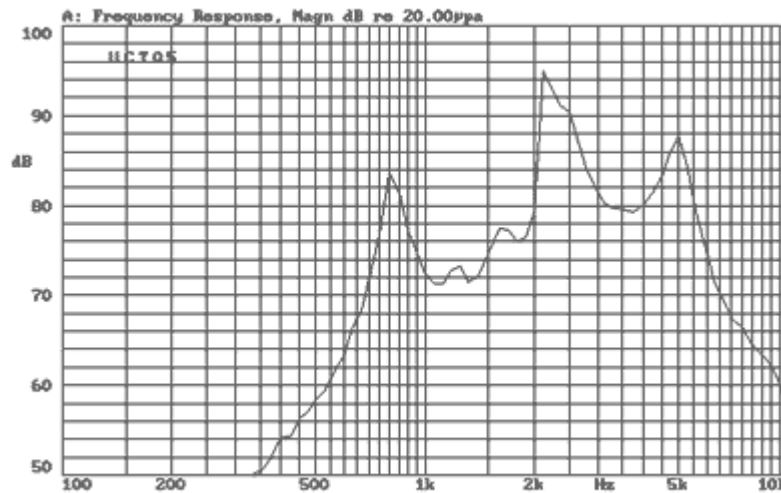

**DIMENSIONS:**

UNIT:mm  
Tolerance:±0.5mm  
Wave Solderable and Washable

