




UCT8503AD4

Type	Unit	UCT8503AD4
Rated Voltage	V	3.6
Operating Voltage	V	2.5-4.5
*Rated Current(MAX)	mA	90
*Min Sound Output at 10 cm	dB	85(typ.88)
Coil Resistance	Ω	16 \pm 3
*Resonant Frequency	Hz	2730
Operating Temperature	$^{\circ}\text{C}$	-30 - +80
Storage Temperature	$^{\circ}\text{C}$	-40 - +85
Housing Material		LCP
Weight	g	0.5


* Value Applying at Rated Voltage(resonant frequency, 1/2duty,square wave)

FREQUENCY RESPONSE:

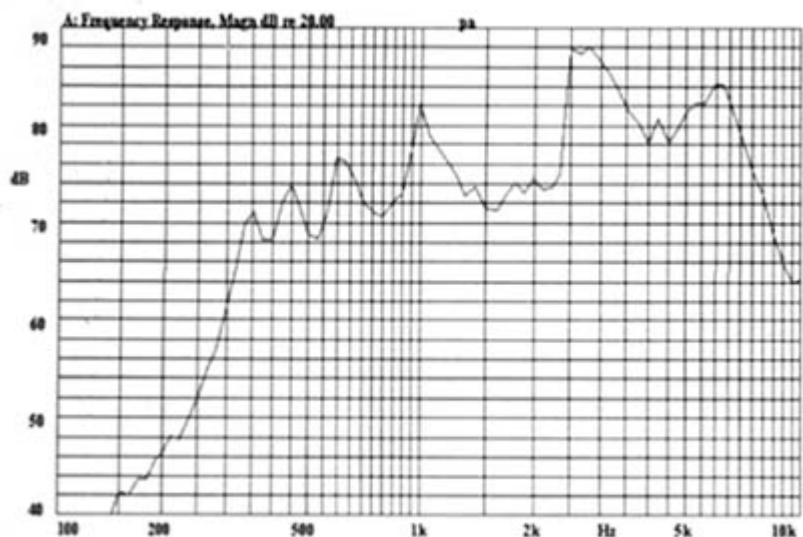

DIMENSIONS:

UNIT:mm
Tolerance: $\pm 0.5\text{mm}$

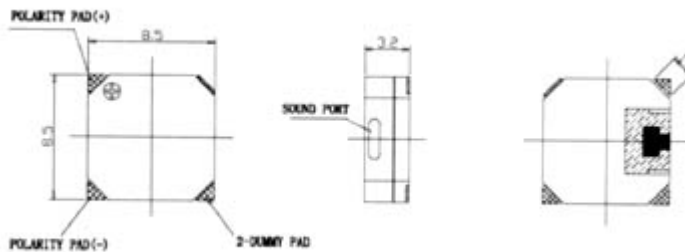




UCT8503AU4


Type	Unit	UCT8503AU4
Rated Voltage	V	3.6
Operating Voltage	V	2.5-4.5
*Rated Current(MAX)	mA	90
*Min Sound Output at 10 cm	dB	85(typ.88)
Coil Resistance	Ω	16 \pm 3
*Resonant Frequency	Hz	3000
Operating Temperature	$^{\circ}$ C	-30 - +80
Storage Temperature	$^{\circ}$ C	-40 - +85
Housing Material		LCP
Weight	g	0.5

* Value Applying at Rated Voltage(resonant frequency, 1/2duty,square wave)

FREQUENCY RESPONSE:

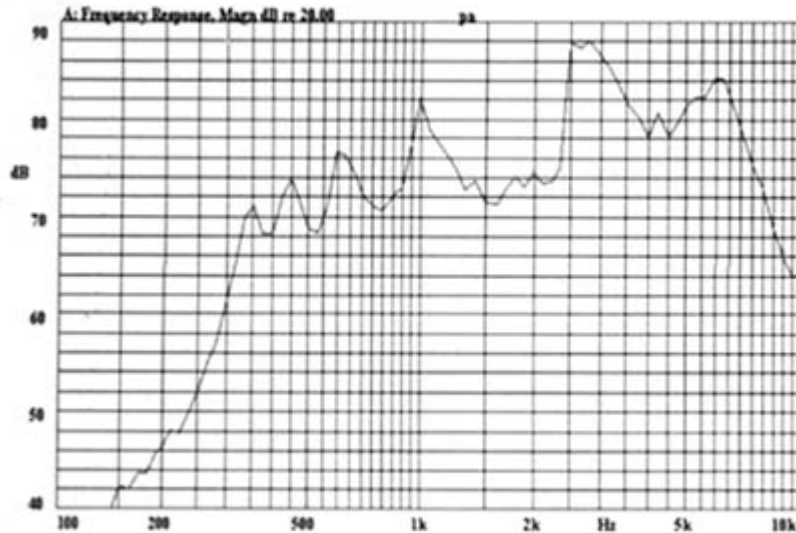

DIMENSIONS:

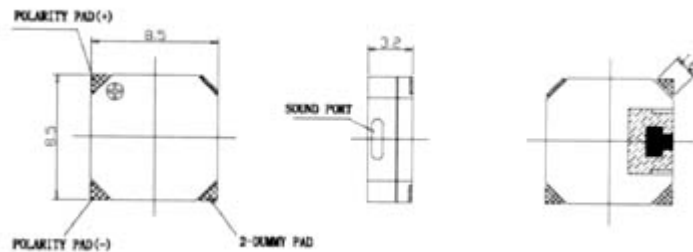

UNIT:mm
Tolerance: \pm 0.5mm

