




UCT8504AD4

Type	Unit	UCT8504AD4
Rated Voltage	V	3.6
Operating Voltage	V	2.5-4.5
*Rated current(max)	mA	90
*Min Sound Output at 10cm	dB	85(typ88)
Coil Resistance	Ω	16 \pm 3
*Resonant Frequency	Hz	2730
Operating Temperature	$^{\circ}$ C	-30 - +80
Storage Temperature	$^{\circ}$ C	-40 - +85
Housing Material		LCP
Weight	g	0.6


*Value Applying at Rated voltage(resonant frequency,1/2duty,square wave)

FREQUENCY RESPONSE:

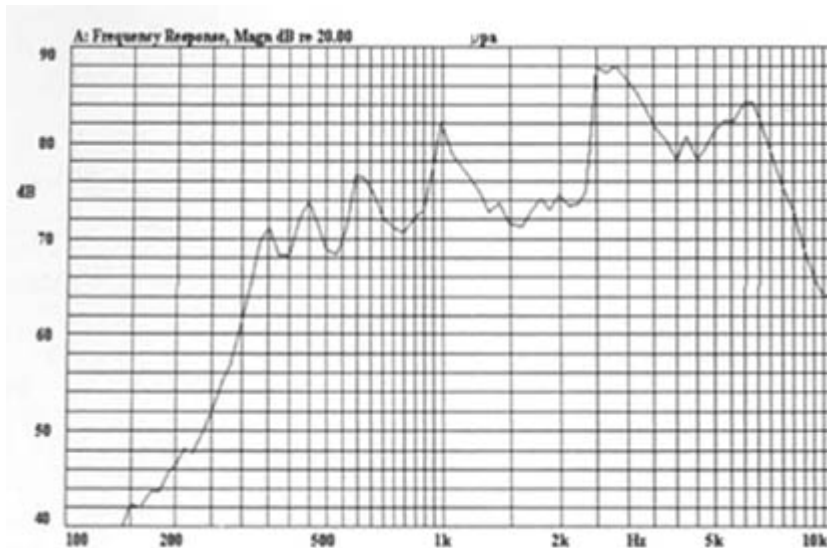

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm

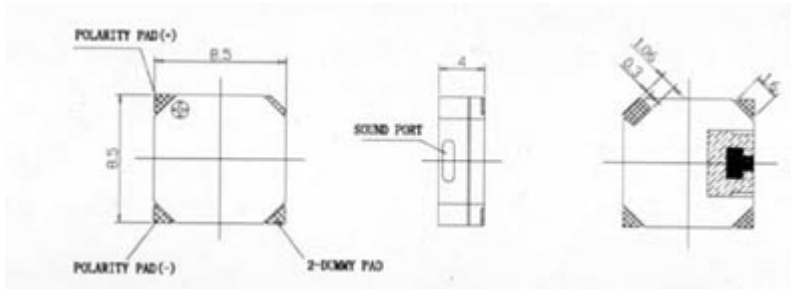




UCT8504AU4

Type	Unit	UCT8504AU4
Rated Voltage	V	3.6
Operating Voltage	V	2.5-4.5
*Rated Current(MAX)	mA	90
*Min Sound Output at 10 cm	dB	87(typ.90)
Coil Resistance	Ω	16 \pm 3
*Resonant Frequency	Hz	3000
Operating Temperature	$^{\circ}$ C	-30 - +80
Storage Temperature	$^{\circ}$ C	-40 - +85
Housing Material		LCP
Weight	g	0.6

* Value Applying at Rated Voltage(resonant frequency,1/2duty,square wave)

FREQUENCY RESPONSE:

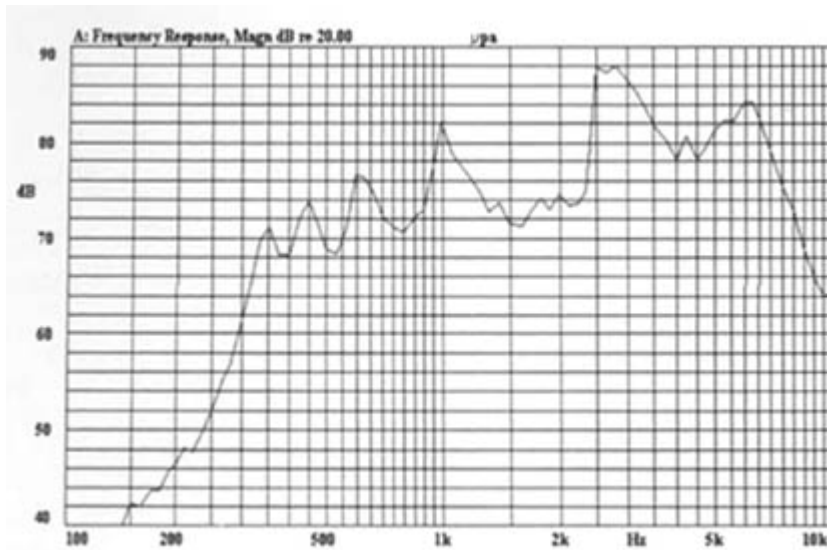

DIMENSIONS:

UNIT:mm
Tolerance:±0.5mm

