




UCT01A

Type	Unit	UCT01A
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	80
Coil Resistance	Ω	15 \pm 3
*Resonant Frequency	Hz	2400
Lead Pin Material		Brass
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		PPS
Weight	g	2.0


*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

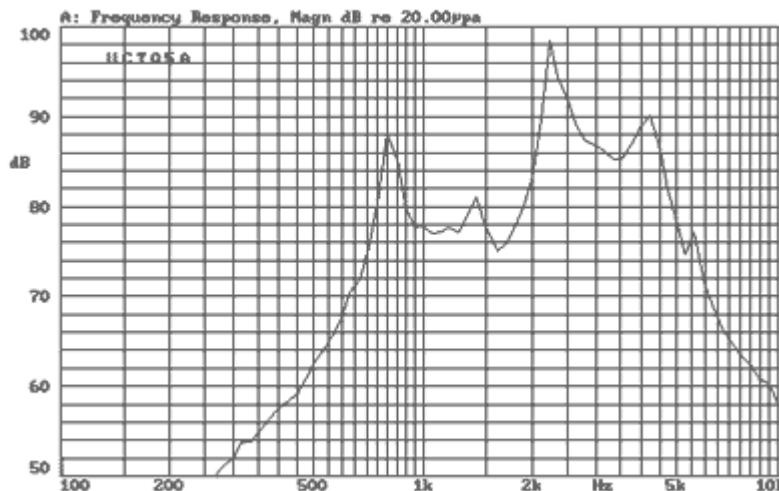

DIMENSIONS:

UNIT:mm
Tolerance:±0.5mm
Wave Solderable and Washable

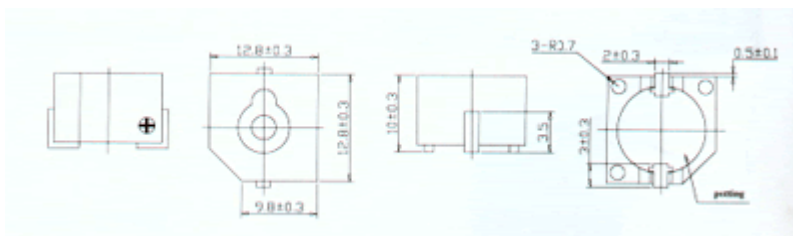




UCT05A

Type	Unit	UCT05A
Rated Voltage	V	5
Operating Voltage	V	4-8
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	47 \pm 5
*Resonant Frequency	Hz	2400
Lead Pin Material	Brass	
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material	PPS	
Weight	g	2.0


*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

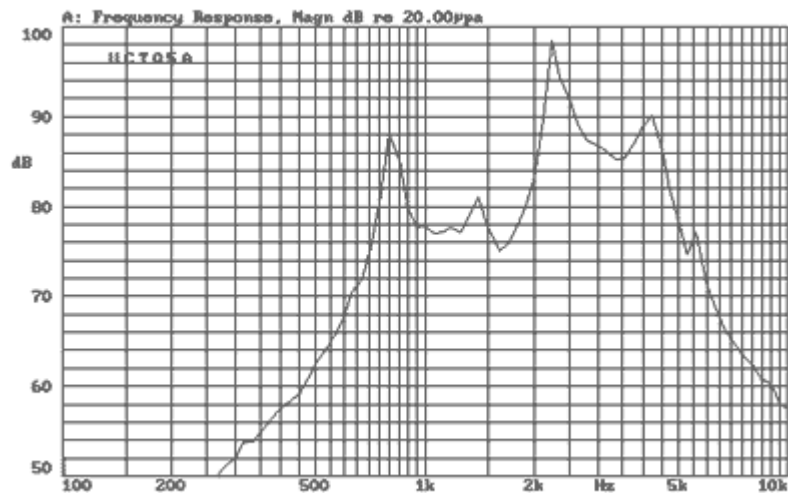

DIMENSIONS:

UNIT:mm
Tolerance:±0.5mm
Wave Solderable and Washable

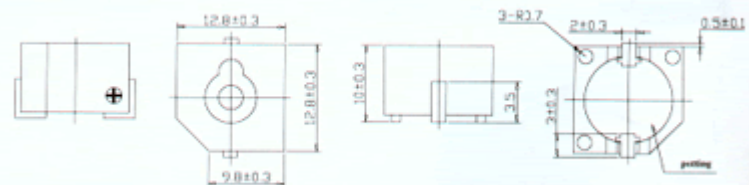




UCT12A

Type	Unit	UCT12A
Rated Voltage	V	12
Operating Voltage	V	8-16
*Rated Current(MAX)	mA	40
*Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	140 \pm 14
*Resonant Frequency	Hz	2400
Lead Pin Material	Brass	
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material	PPS	
Weight	g	2.0

*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

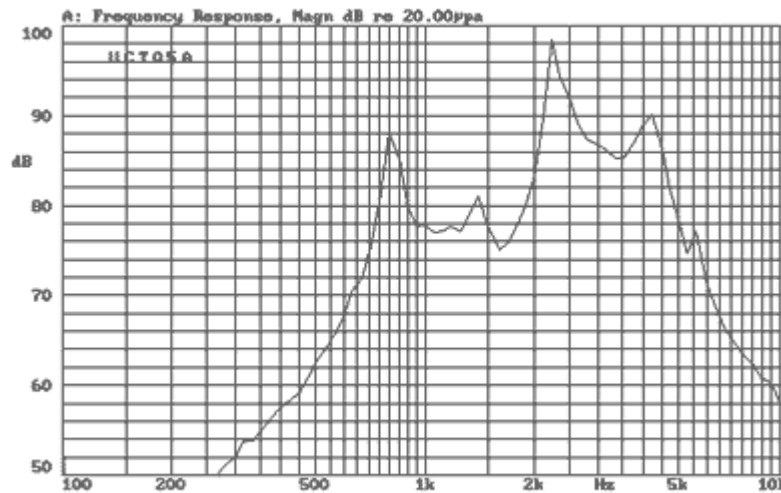

DIMENSIONS:

UNIT:mm
Tolerance: \pm 0.5mm
Wave Solderable and Washable

