




UCT01AX

Type	Unit	UCT01AX
Rated Voltage	V	1.5
Operating Voltage	V	1-3
*Rated Current (MAX)	mA	20
*Min Sound Output at 10 cm	dB	80
*Resonant Frequency	Hz	2400±400
Lead Pin Material	Brass	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	PPS	
Weight	g	2.0


*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

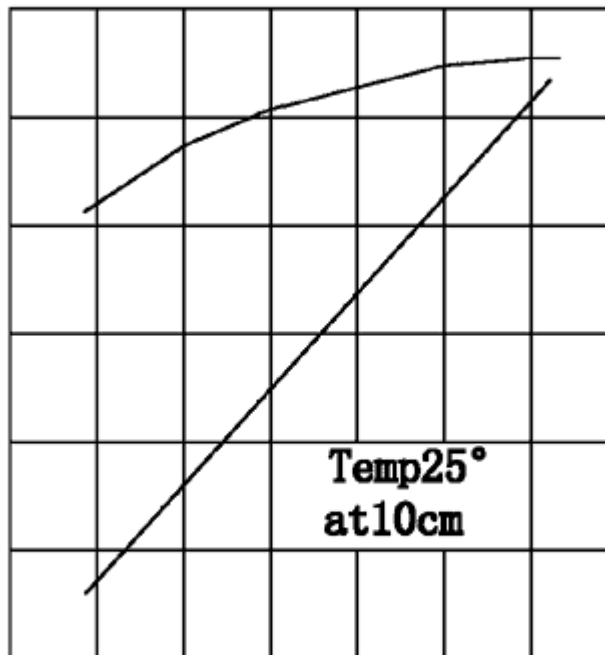

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm
Wave Solderable and Washable

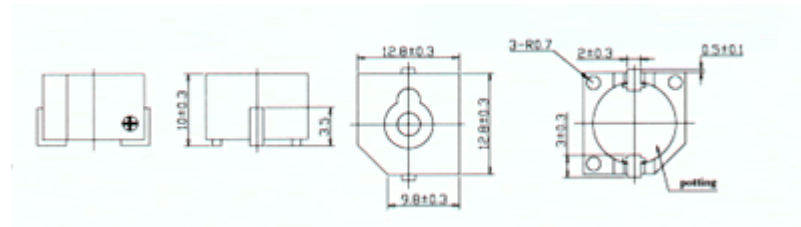




UCT05AX

Type	Unit	UCT05AX
Rated Voltage	V	5
Operating Voltage	V	3-7
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
*Resonant Frequency	Hz	2300±300
Lead Pin Material	Brass	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	PPS	
Weight	g	2.0


*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

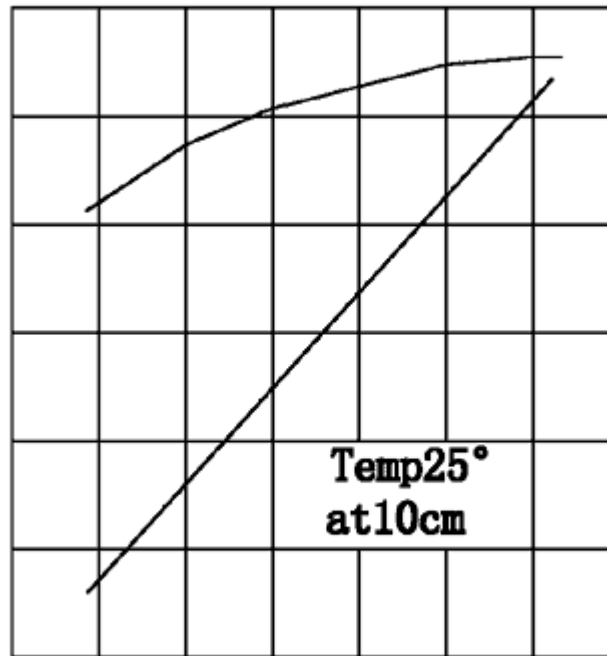

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm
Wave Solderable and Washable

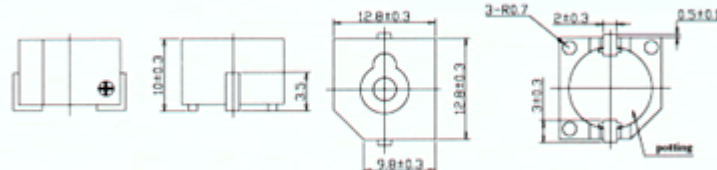




UCT12AX

Type	Unit	UCT12AX
Rated Voltage	V	12
Operating Voltage	V	8-15
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
*Resonant Frequency	Hz	2300±300
Lead Pin Material		Brass
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material		PPS
Weight	g	2.0

*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

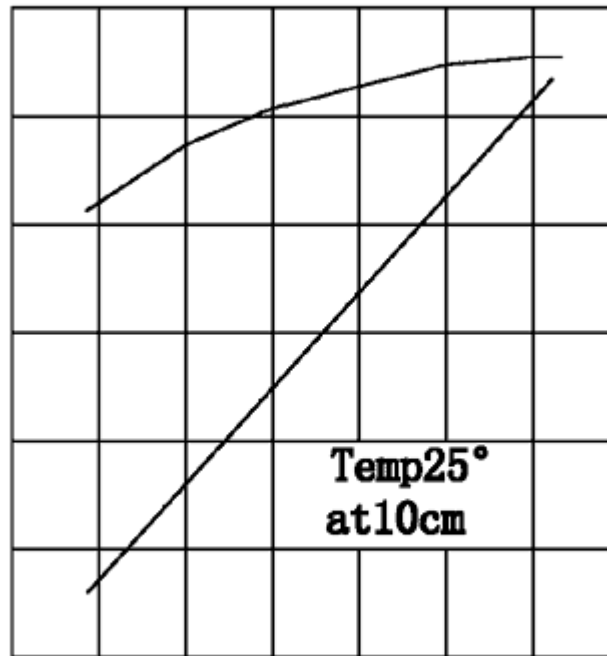

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm
Wave Solderable and Washable

