




UCT03X

Type	Unit	UCT03X
Rated Voltage	V	3
Operating Voltage	V	2-5
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	75
*Resonant Frequency	Hz	2400±400
Lead Pin Material	Brass	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	PPS	
Weight	g	2.0


\*Value Applying at Rated Voltage (DC)

**FREQUENCY RESPONSE:**

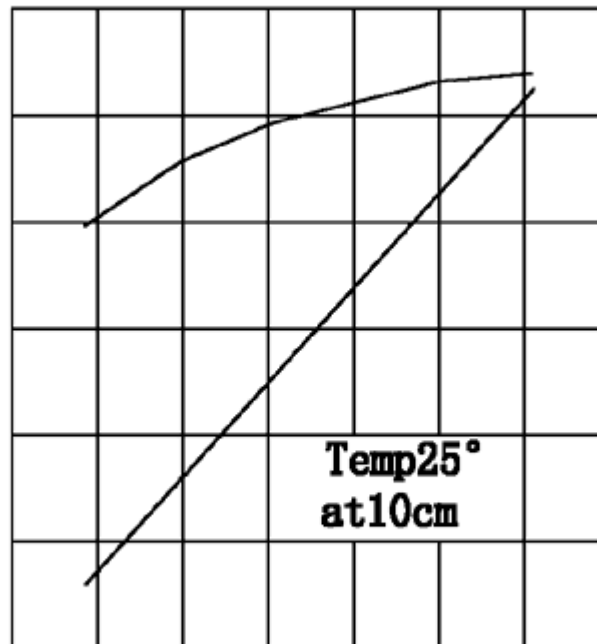

**DIMENSIONS:**

UNIT: mm  
Tolerance: ±0.5mm  
Wave Solderable and Washable

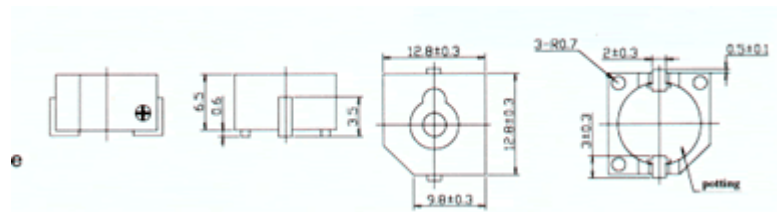




UCT05X

Type	Unit	UCT05X
Rated Voltage	V	5
Operating Voltage	V	4-7
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	88
*Resonant Frequency	Hz	2400±400
Lead Pin Material	Brass	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	PPS	
Weight	g	2.0


\*Value Applying at Rated Voltage (DC)

**FREQUENCY RESPONSE:**

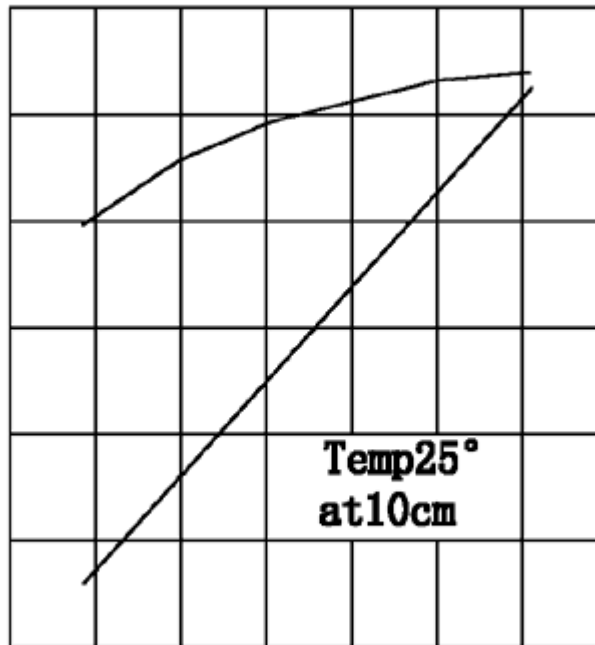

**DIMENSIONS:**

UNIT: mm  
Tolerance: ±0.5mm  
Wave Solderable and Washable

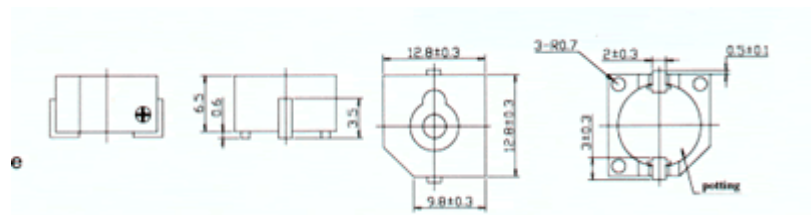






UCT12X

Type	Unit	UCT12X
Rated Voltage	V	12
Operating Voltage	V	8-15
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	85
*Resonant Frequency	Hz	2400±400
Lead Pin Material	Brass	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	PPS	
Weight	g	2.0

\*Value Applying at Rated Voltage (DC)

**FREQUENCY RESPONSE:**

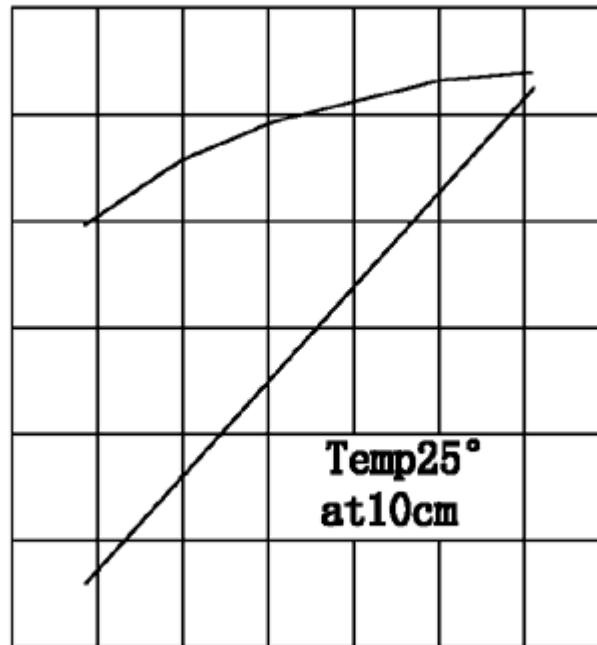

**DIMENSIONS:**

UNIT: mm  
Tolerance: ±0.5mm  
Wave Solderable and Washable

