



UME348-6


Type	Unit	UME348-6
Rated Voltage	VDC	6
Operating Voltage	VDC	4-8
*Rated Current(MAX)	mA	50
*Min Sound Output at 10 cm	dB	95
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material	ABS	
Weight	g	17

*Value Applying at Rated Voltage

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

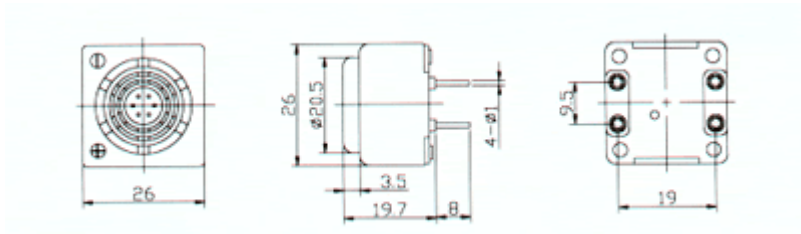



UME348-12


Type	Unit	UME348-12
Rated Voltage	VDC	12
Operating Voltage	VDC	8-16
*Rated Current(MAX)	mA	50
*Min Sound Output at 10 cm	dB	95
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material	ABS	
Weight	g	17

*Value Applying at Rated Voltage

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

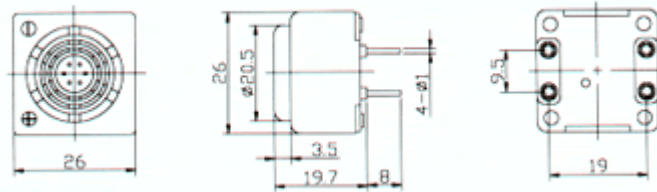



UME348-24

Type	Unit	UME348-24
Rated Voltage	VDC	24
Operating Voltage	VDC	20-28
*Rated Current(MAX)	mA	50
*Min Sound Output at 10 cm	dB	95
Fundamental Frequency	Hz	400±100
Tone Nature		Single
Lead Pin Material		Red Copper
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material		ABS
Weight	g	17

*Value Applying at Rated Voltage.

**FREQUENCY RESPONSE:
DIMENSIONS:**

UNIT: mm
Tolerance: ±0.5mm

