



UME668-1.5


Type	Unit	UME668-1.5
Rated Voltage	V	1.5
Operating Voltage	V	1.2-3
*Rated Current(MAX)	mA	20
*Min Sound Output at 20 cm	dB	70
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-10 - +60
Storage Temperature	°C	-10 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

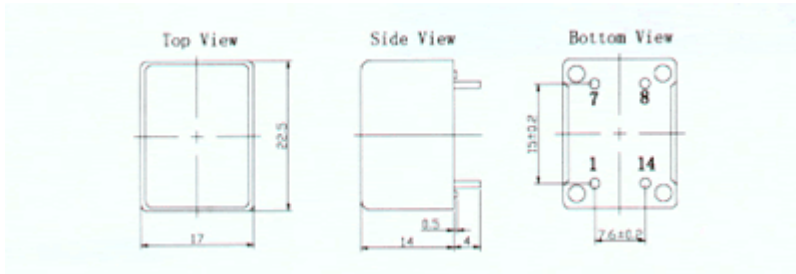



UME668-3


Type	Unit	UME668-3
Rated Voltage	V	3
Operating Voltage	V	2-4
*Rated Current(MAX)	mA	25
*Min Sound Output at 20 cm	dB	70
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-10 - +60
Storage Temperature	°C	-10 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

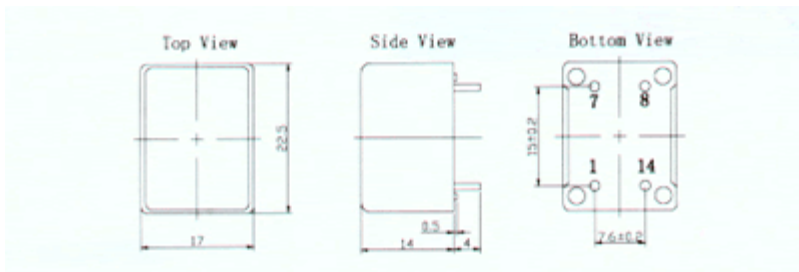



UME668-6


Type	Unit	UME668-6
Rated Voltage	V	6
Operating Voltage	V	4-8
*Rated Current(MAX)	mA	25
*Min Sound Output at 20 cm	dB	75
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-10 - +60
Storage Temperature	°C	-10 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

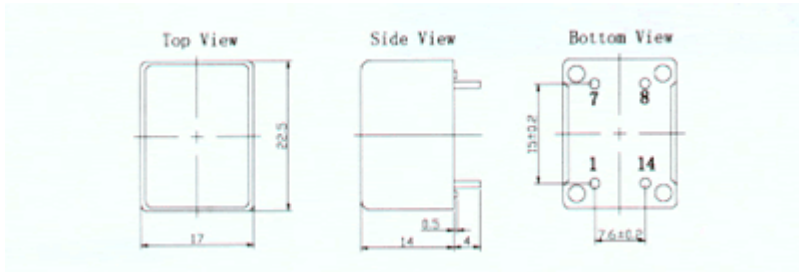



UME668-9


Type	Unit	UME668-9
Rated Voltage	V	9
Operating Voltage	V	6-12
*Rated Current(MAX)	mA	25
*Min Sound Output at 20 cm	dB	75
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-10 - +60
Storage Temperature	°C	-10 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

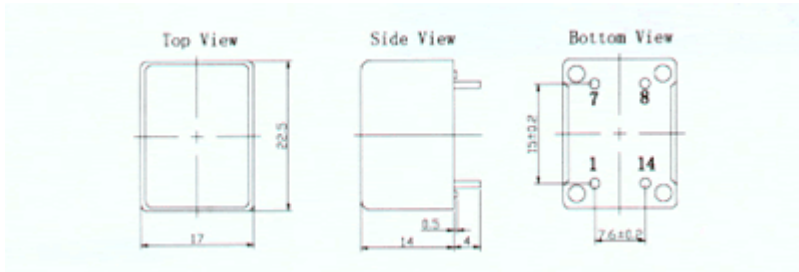



UME668-12


Type	Unit	UME668-12
Rated Voltage	V	12
Operating Voltage	V	9-15
*Rated Current(MAX)	mA	25
*Min Sound Output at 20 cm	dB	75
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-10 - +60
Storage Temperature	°C	-10 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

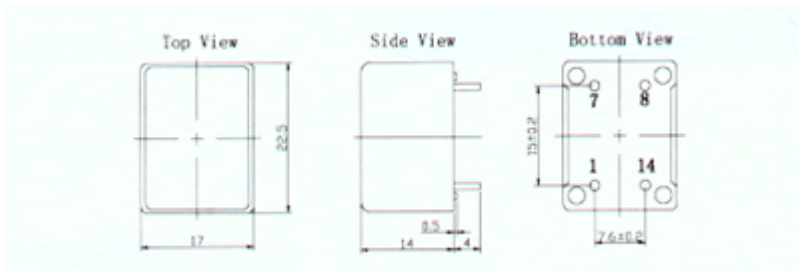



UME668-24

Type	Unit	UME668-24
Rated Voltage	V	24
Operating Voltage	V	15-27
*Rated Current(MAX)	mA	30
*Min Sound Output at 20 cm	dB	75
Fundamental Frequency	Hz	400±100
Tone Nature	Single	
Lead Pin Material	Red Copper	
Operating Temperature	°C	-10 - +60
Storage Temperature	°C	-10 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

