



UME669-6


Type	Unit	UME669-6
Rated Voltage	V	6
Operating Voltage	V	4-8
*Rated Current(MAX)	mA	25
*Min Sound Output at 30 cm	dB	75
*Resonant Frequency	Hz	400±100
Lead Pin Material	Red Copper	
Tone Nature	Single	
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material	ABS	
Weight	g	10

*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

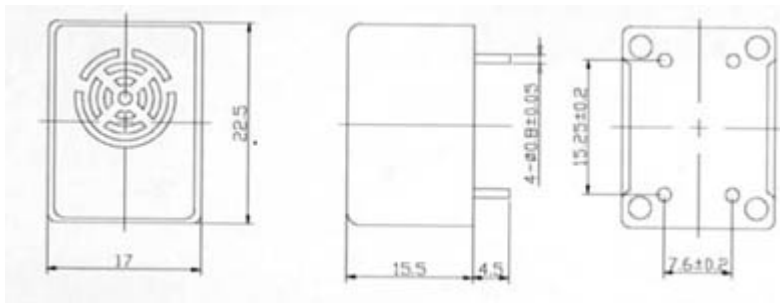



UME669-12

Type	Unit	UME669-12
Rated Voltage	V	12
Operating Voltage	V	9-15
*Rated Current(MAX)	mA	25
*Min Sound Output at 30 cm	dB	75
*Resonant Frequency	Hz	400±100
Lead Pin Material	Red Copper	
Tone Nature	Single	
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Materia	ABS	
Weight	g	10

*Value Applying at Rated Voltage (DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

