



UME728-6


Type	Unit	UME728-6
Rated Voltage	V	6
Operating Voltage	V	4-8
*Rated Current(MAX)	mA	65
*Min Sound Output at 10 cm	dB	95
Fundamental Frequency	Hz	400±100
Tone Nature		Single
Tab Material		Brass
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material		ABS
Weight	g	17

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

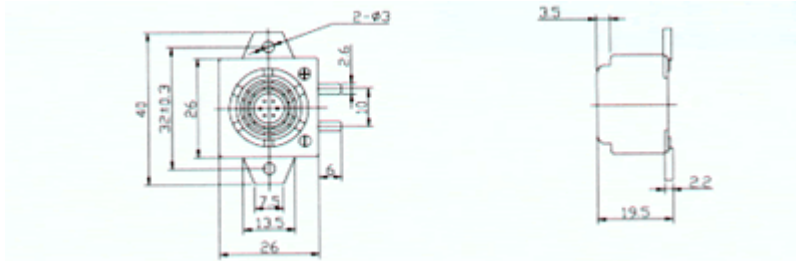



UME728-24

Type	Unit	UME728-24
Rated Voltage	V	24
Operating Voltage	V	20-28
*Rated Current(MAX)	mA	55
*Min Sound Output at 10 cm	dB	95
Fundamental Frequency	Hz	400±100
Tone Nature		Single
Tab Material		Brass
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material		ABS
Weight	g	17

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

