



UME728J-6


| | | |
|----------------------------|--------------|-----------|
| Type | Unit | UME728J-6 |
| Rated Voltage | V | 6 |
| Operating Voltage | V | 4-8 |
| *Rated Current(MAX) | mA | 65 |
| *Min Sound Output at 10 cm | dB | 92 |
| Fundamental Frequency | Hz | 400±100 |
| Tone Nature | Single | |
| Lead Wire | UL1007 AWG28 | |
| Operating Temperature | °C | -20 - +60 |
| Storage Temperature | °C | -30 - +70 |
| Housing Material | ABS | |
| Weight | g | 17 |

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

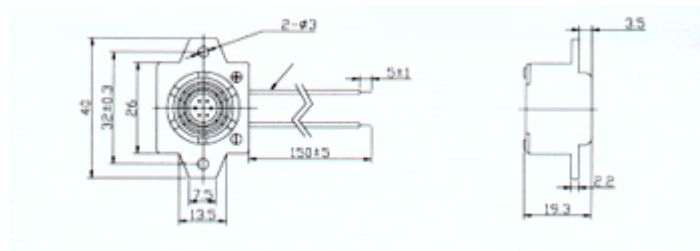



UME728J-12


| | | |
|----------------------------|--------------|------------|
| Type | Unit | UME728J-12 |
| Rated Voltage | V | 12 |
| Operating Voltage | V | 8-16 |
| *Rated Current(MAX) | mA | 55 |
| *Min Sound Output at 10 cm | dB | 92 |
| Fundamental Frequency | Hz | 400±100 |
| Tone Nature | Single | |
| Lead Wire | UL1007 AWG28 | |
| Operating Temperature | °C | -20 - +60 |
| Storage Temperature | °C | -30 - +70 |
| Housing Material | ABS | |
| Weight | g | 17 |

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

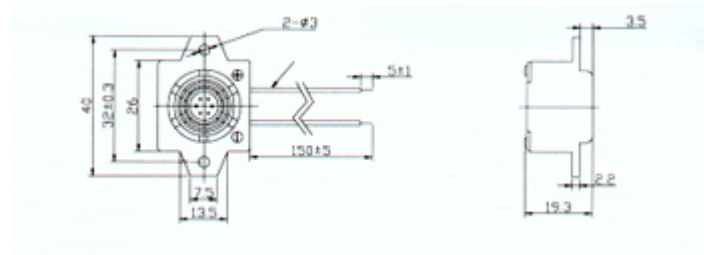



UME728J-24

| | | |
|----------------------------|------|--------------|
| Type | Unit | UME728J-24 |
| Rated Voltage | V | 24 |
| Operating Voltage | V | 20-28 |
| *Rated Current(MAX) | mA | 55 |
| *Min Sound Output at 20 cm | dB | 92 |
| Fundamental Frequency | Hz | 400±100 |
| Tone Nature | | Single |
| Lead Wire | | UL1007 AWG28 |
| Operating Temperature | °C | -20 - +60 |
| Storage Temperature | °C | -30 - +70 |
| Housing Material | | ABS |
| Weight | g | 17 |

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

