




UPA13C4003P3

Type	Unit	UPA13C4003P3
Rated Voltage(Square wave)	Vp-p	3
Operating Voltage	Vp-p	1-25
*Rated Current(MAX)	mA	2
*Min Sound Output at 4 KHz/10cm	dB	70
Capacitance at 120Hz	pF	12000±30%
*Resonant Frequency	Hz	4000±500
Lead Pin Material	Red Copper	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	NORYL	
Weight	g	1

\*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

**FREQUENCY RESPONSE:**

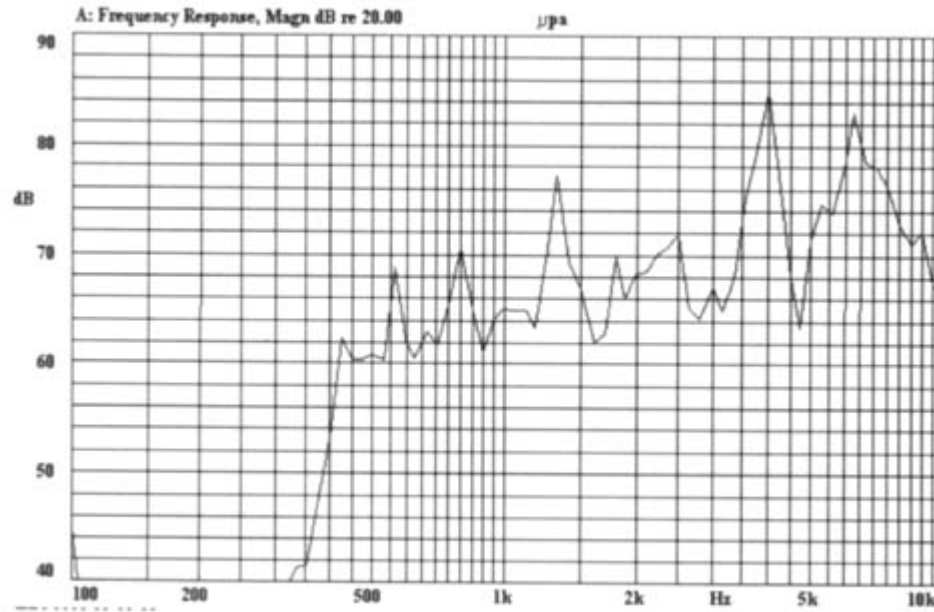

**DIMENSIONS:**

UNIT: mm  
Tolerance: ±0.5mm

