




UPA13E4810W

| | | |
|---------------------------------|--------------|-------------|
| Type | Unit | UPA13E4610W |
| Rated Voltage(Square Ware) | vp-p | 10 |
| Operating Voltage | vp-p | 1-30 |
| *Rated Current(MAX) | mA | 5 |
| *Min Sound Output at 4 KHz/10cm | dB | 80 |
| Capacitance at 120Hz | pF | 15000±30% |
| *Resonant Frequency | Hz | 4800±500 |
| Lead Wire | UL1571 AWG32 | |
| Operating Temperature | °C | -20 - +70 |
| Storage Temperature | °C | -30 - +75 |
| Housing Material | ABS | |
| Weight | g | 1 |

*Value Applying at Rated Voltage

FREQUENCY RESPONSE:

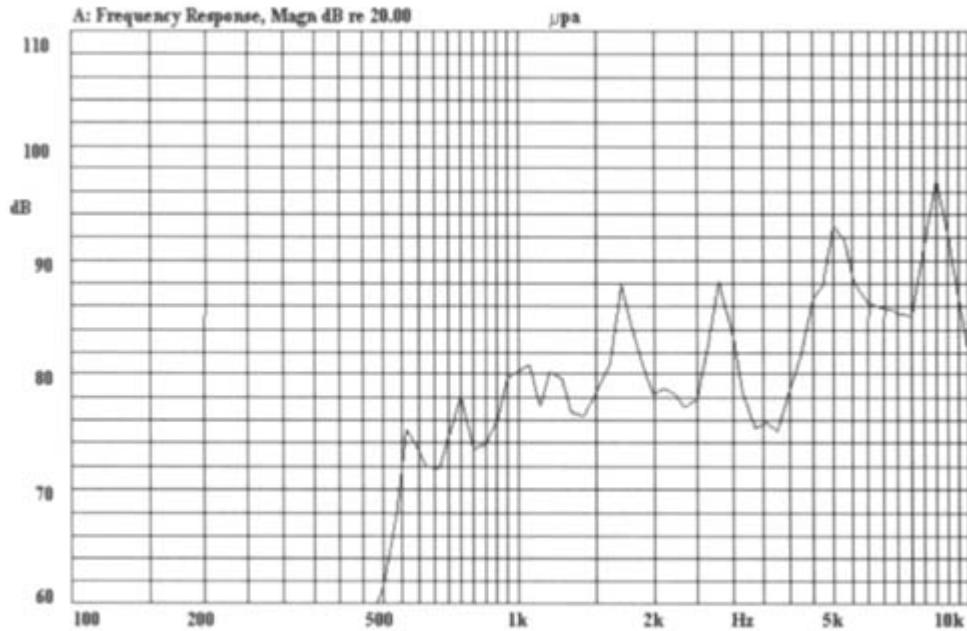

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

