




UPA14B4810W

Type	Unit	UPA14B4810W
Rated Voltage(Square Wave)	Vp-p	10
Operating Voltage	Vp-p	1-30
*Rated Current(MAX)	mA	2
*Min Sound Output at 4.8KHz/10 cm	dB	85
*Resonant Frequency	Hz	4800±500
Capacitance at 120Hz	pF	15000±30%
Lead Wire	UL1571 AWG30	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	NORYL	
Weight	g	1

\*Value Applying at Rated Voltage(resonant frequency,1/2 duty,square wave)

**FREQUENCY RESPONSE:**

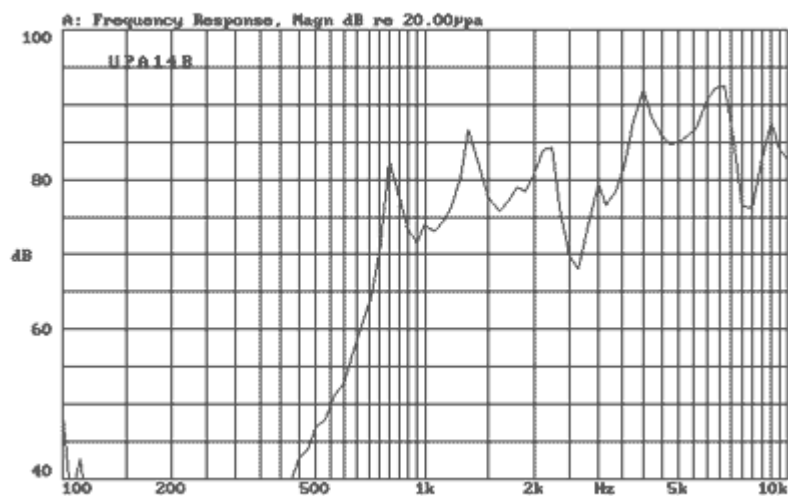

**DIMENSIONS:**

UNIT: mm  
Tolerance: ±0.5mm

