




UPA17A4009W

| | | |
|---------------------------------|--------------|-------------|
| Type | Unit | UPA17A4009W |
| Rated Voltage(Square Wave) | Vp-p | 9 |
| Operating Voltage | Vp-p | 1-30 |
| *Rated Current(MAX) | mA | 2 |
| *Min Sound Output at 4KHz/10 cm | dB | 80 |
| *Resonant Frequency | Hz | 4000±500 |
| Capacitance at 120Hz | pF | 15000±30% |
| Lead Wire | UL1571 AWG30 | |
| Operating Temperature | °C | -20 - +60 |
| Storage Temperature | °C | -30 - +70 |
| Housing Material | ABS | |
| Weight | g | 1 |

*Value Applying at Rated Voltage

FREQUENCY RESPONSE:

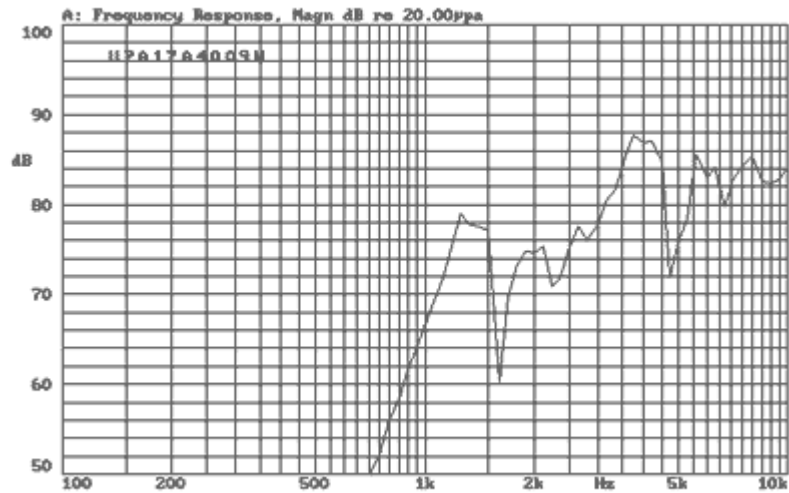

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

