




UPA17C4005P

Type	Unit	UPA17C4005P
Rated Voltage(Square Wave)	Vp-p	5
Operating Voltage	Vp-p	1-30
*Rated Current(MAX)	mA	1
*Min Sound Output at 4.0KHz/10 cm	dB	78
*Resonant Frequency	Hz	4000±500
Capacitance at 120Hz	pF	15000±30%
Lead Pin Material	Phosphor Bronze	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	NORYL	
Weight	g	1

\*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)

**FREQUENCY RESPONSE:**

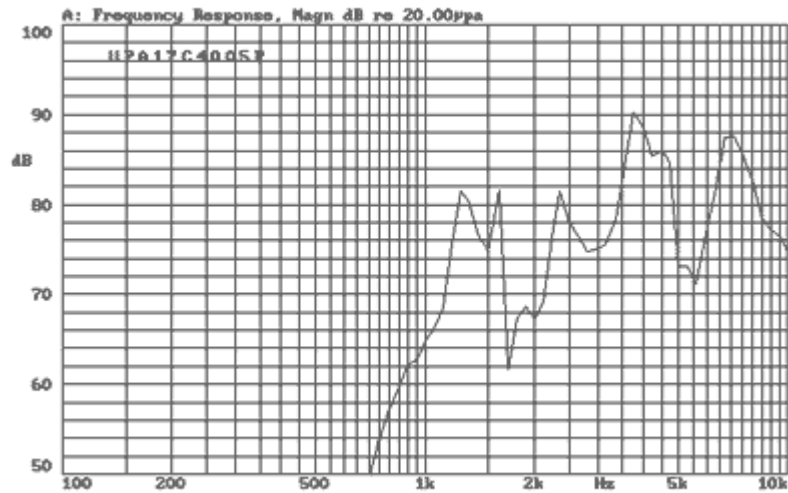

**DIMENSIONS:**

UNIT: mm  
Tolerance: ±0.5mm

