




UPA22A2003P

Type	Unit	UPA22A2003P
Rated Voltage(Square Wave)	Vp-p	3
Operating Voltage	Vp-p	1-25
*Rated Current(MAX)	mA	1
*Min Sound Output at 2.0KHz/10 cm	dB	70
*Resonant Frequency	Hz	2000±500
Capacitance at 120Hz	pF	19000±30%
Lead Pin Material	Beryllium Bronze	
Operating Temperature	°C	-20 - +70
Storage Temperature	°C	-30 - +80
Housing Material	NORYL	
Weight	g	3

*Value Applying at Rated Voltage(resonant frequency,1/2 duty,square wave)

FREQUENCY RESPONSE:

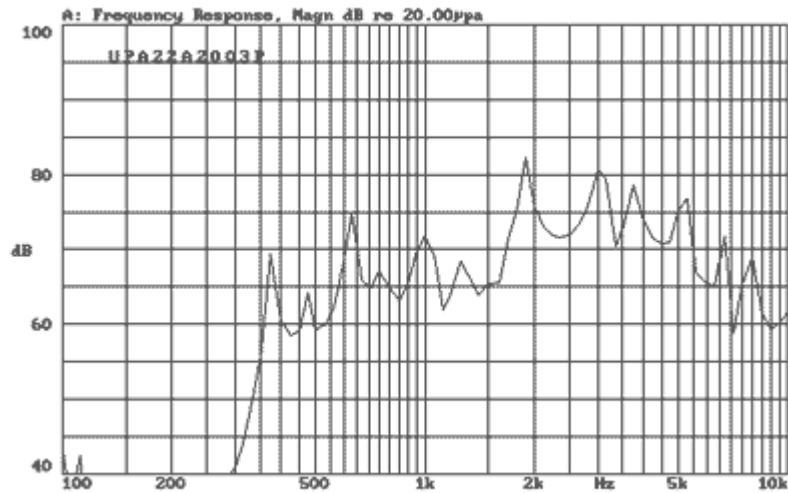

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

