




UPA22CX4512W

Type	Unit	UPA22CX4512W
Rated Voltage(Square Wave)	V	12
Operating Voltage	V	3-30
*Rated Current(MAX)	mA	3
*Min Sound Output at 30 cm	dB	80
*Resonant Frequency	Hz	4500±500
Tone Nature		Single
Lead Wire		UL1007 AWG26
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material		ABS
Weight	g	4

*Value Applying at Rated Voltage(DC)

FREQUENCY RESPONSE:

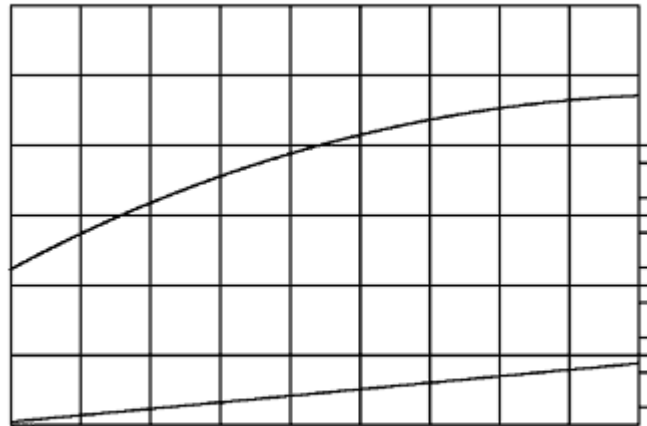

DIMENSIONS:

UNIT:mm
Tolerance: ±0.5mm

