




UPA22DX4512W

Type	Unit	UPA22DX4512W
Rated Voltage	V	12
Operating Voltage	V	3-28
*Rated Current(MAX)	mA	5
*Min Sound Output at 10 cm	dB	90
*Resonant Frequency	Hz	4500±500
Tone Nature		Single
Lead Wire		UL1007 AWG26
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material		ABS
Weight	g	5

*Value Applying at Rated Voltage(resonant frequency,1/2 duty, square wave)

FREQUENCY RESPONSE:

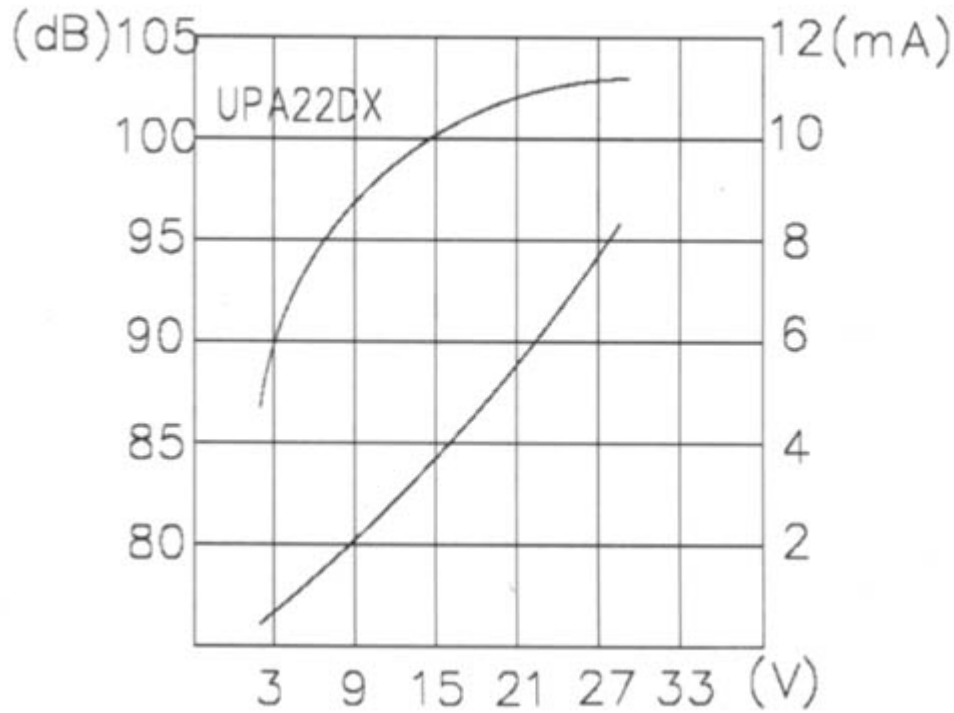

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

