




UPA23A4012W

Type	Unit	UPA23A4012W
Rated Voltage(Square Wave)	V	12
Operating Voltage	V	1-30
*Rated Current(MAX)	mA	5
*Min Sound Output at 4.0KHz/30 cm	dB	80
*Resonant Frequency	Hz	4000±500
Capacitance at 120Hz	pF	24000±30%
Lead Wire		UL1095 AWG28
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material		ABS
Weight	g	2

*Value Applying at Rated Voltage(DC)(resonant frequency,1/2 duty,square wave)

FREQUENCY RESPONSE:

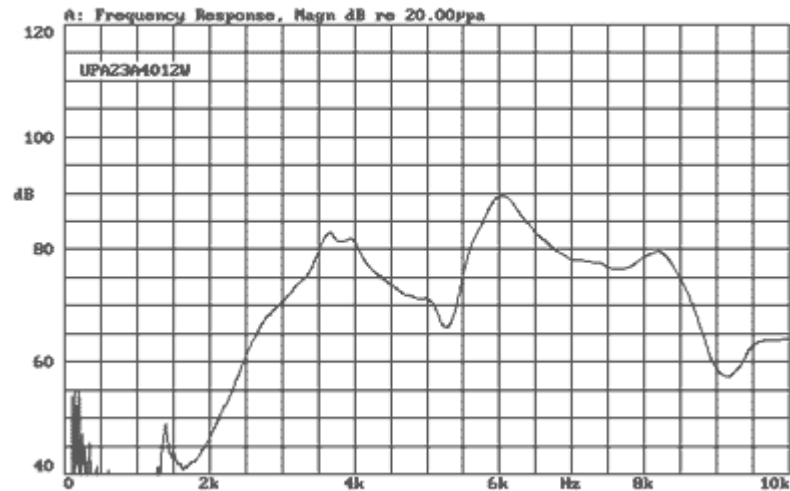

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

