




UPA23C3009P

Type	Unit	UPA23C3009P
Rated Voltage(Square Wave)	Vp-p	9
Operating Voltage	Vp-p	1-30
*Rated Current(MAX)	mA	5
*Min Sound Output at 3.0 KHz/30 cm	dB	80
*Resonant Frequency	Hz	3000±500
Capacitance at 120Hz	pF	24000±30%
Lead Pin Material	Red Copper	
Operating Temperature	°C	-20 - +60
Storage Temperature	°C	-30 - +70
Housing Material	ABS	
Weight	g	3

*Value Applying at Rated Voltage(resonant frequency,1/2 duty,square wave)

FREQUENCY RESPONSE:

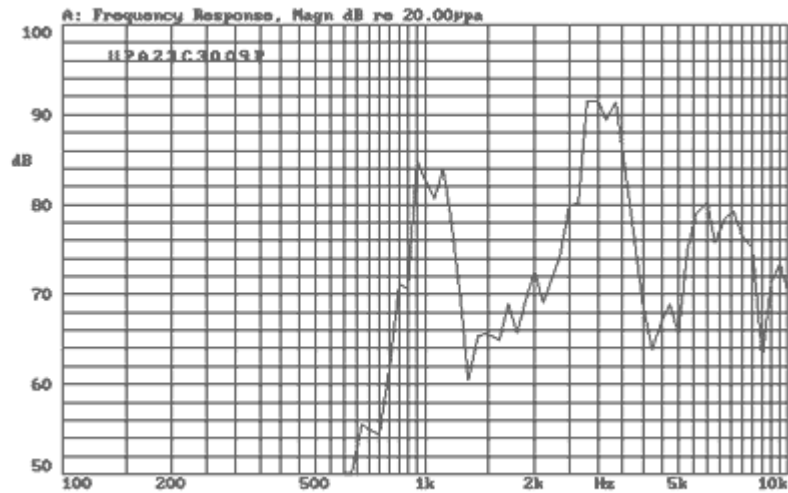

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

