




UPA24B3210P

Type	Unit	UPA24B3210P
Rated Voltage(Square wave)	Vp-p	10
Operating Voltage	Vp-p	1-30
*Rated Current(MAX)	mA	10
*Min Sound Output at 3.2KHz/10 cm	dB	90
*Resonant Frequency	Hz	3200±500
Capacitance at 1KHz	PF	25000±30%
Lead Pin Material		Red Copper
Operating Temperature	°C	-30 - +115
Storage Temperature	°C	-40 - +125
Housing Material		NORYL SE1-GFN2
Weight	g	3.7

*Value Applying at Rated Voltage(resonant frequency,1/2 duty,square wave)

FREQUENCY RESPONSE:

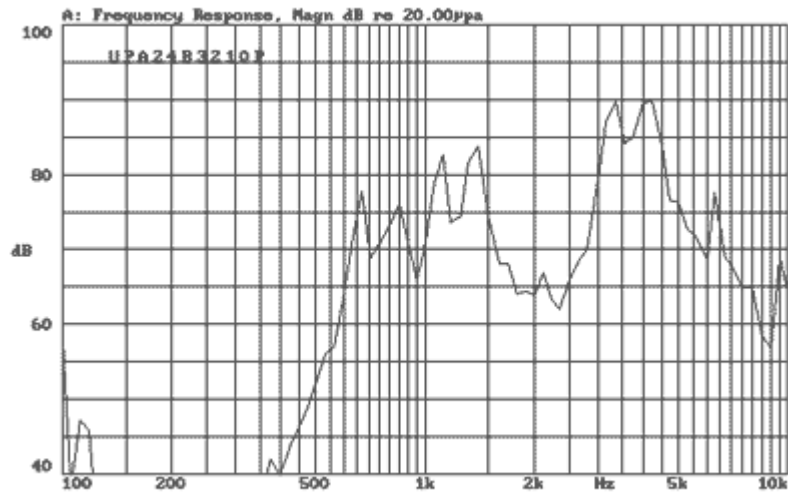

DIMENSIONS:

UNIT: mm
Tolerance: ±0.5mm

