

ER26500

3.6V Primary Lithium Thionyl Chloride High Energy C-size Bobbin Battery



Characteristics

- High energy density
- High and stable operating voltage during most of the lifetime in the application
- Wide range of operating temperature (-55°C ~ +85°C)
- Long operating time
- Low self-discharge rate (less than 1% after 1 year of storage)
- Long storage life (over 10 years under normal room temperature)

Main Applications

- Utility metering
- Automatic meter reading
- Medical electronics
- Remote monitoring systems
- Portable communications
- Industrial applications

Electrical Specifications (23±2°C)

Nominal capacity(2mA~2V):	8.5Ah
Rated voltage:	3.6V
Max constant current of discharge:	130mA
Max discharge current(pulse):	400mA
Operating temperature range:	-55°C ~ +85°C

U.L. Component Recognition MH 29130

Physical Specifications

Diameter(max.)	26.2mm
Height(max.)	50.0mm
Weight(max.)	53g

Available terminations

S: Standard termination


T: Solder tabs

P: Axial pins

Special terminations are available upon request.

MSDS is available upon request.

ER26500

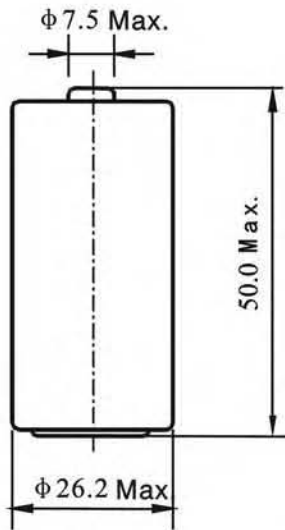


S: Standard termination


Warning

- Fire, explosion and burn hazard
- Do not recharge, short circuit, crush, disassemble, heat above 100°C, incinerate
- Do not use the battery beyond the permitted temperature range

Discharge Characteristics at 23±2°C

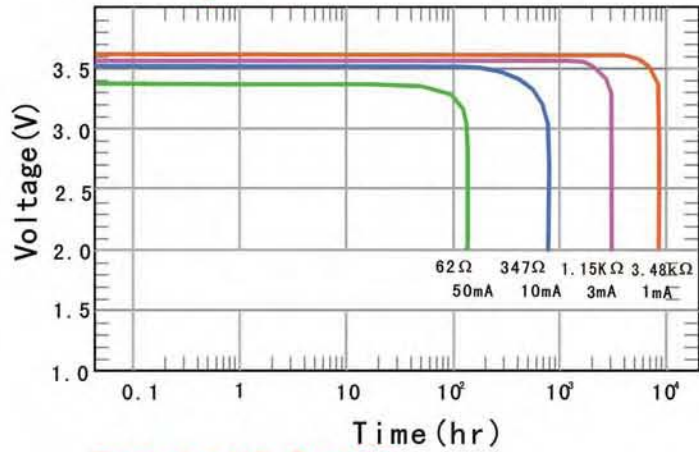

Capacity VS. Current

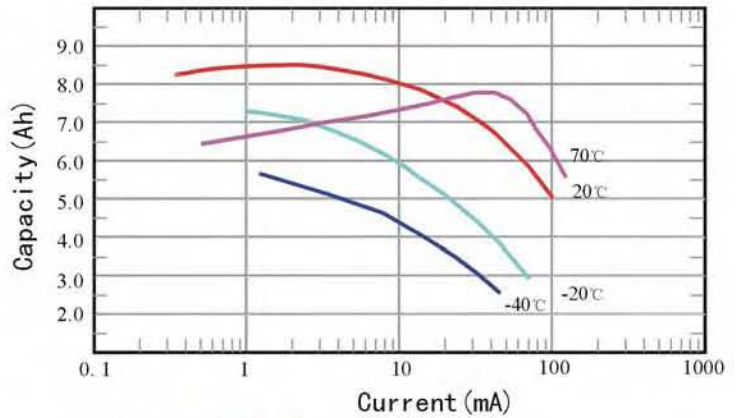

Voltage VS. Temperature

